



JDBB 自润滑翻边轴套 JDBB Metric Flange Bushing

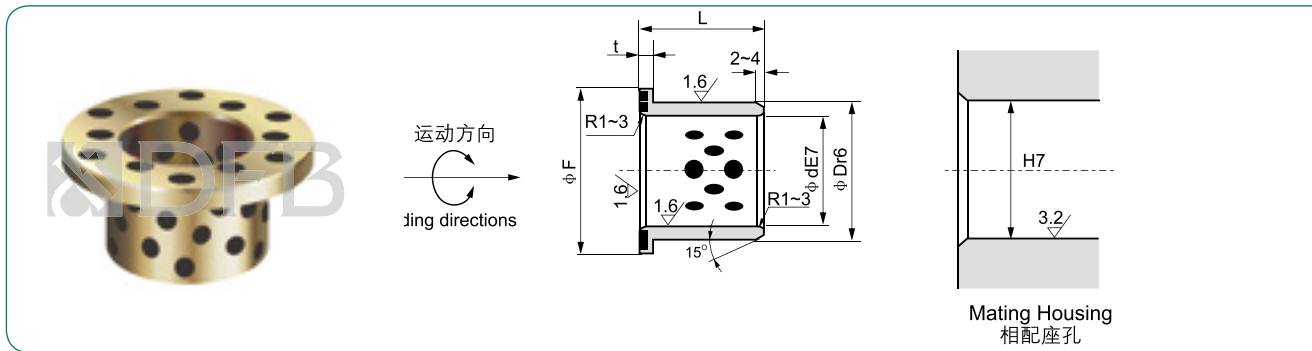

内径 E7 I.D. $\varnothing d$		外径 r6 O.D. $\varnothing D$		翻边 Flange		长度 L ^{-0.1} / _{-0.3}									
				$\varnothing F$	t	10	11	12	13	15	18	20	23	25	
6	+0.032 +0.020	10	+0.028 +0.019	20	3	0610	0611	0612							
8	+0.040 +0.025	12	+0.034 +0.023	25				0812	0813	0815					
10		14								1013		1018			
12	+0.050 +0.032	18	+0.041 +0.028	30				1211				1218		1223	
13		19							1313		1318		1323		
15		21							1513		1518		1523		
16		22							1613		1618		1623	1625	
18		24		40							1818		1823		
20	+0.061 +0.040	28	+0.050 +0.034	45		5							2020		2025
25		33												2520	
30		38											3020		3025
35		44											3520		3525
40	+0.075 +0.050	50	+0.060 +0.041	70	7										
50	62														
60	74	+0.062 +0.043				110	8								
70	85	+0.073 +0.051						120	10						
80	+0.090 +0.060	96		140											

JDBB 自润滑翻边轴套 JDBB Metric Flange Bushing

Material	650 # + Graphite
材质	高力黄铜 + 石墨

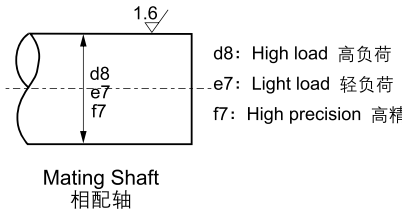

单位 (Unit): mm

长度 $L \begin{smallmatrix} -0.1 \\ 0.3 \end{smallmatrix}$												压装后内孔 I.D. After Press-Fitting	内径 I.D. Ø d
27	35	37	38	47	48	50	58	60	68	80	90		
												+0.016 +0.004	6
												+0.021 +0.006	8
												+0.031 +0.013	10
												+0.026 +0.008	12
												+0.037 +0.016	13
												+0.032 +0.011	15
												+0.046 +0.021	16
												+0.040 +0.015	18
	3035											+0.053 +0.023	20
	3535											+0.046 +0.016	25
4027		4037		4047								+0.040 +0.015	30
			5038		5048		5058					+0.046 +0.016	35
			6038		6048		6058		6068			+0.046 +0.016	40
						7075				7080		+0.046 +0.016	50
								8060			8090	+0.046 +0.016	60
												+0.046 +0.016	70
												+0.046 +0.016	80